



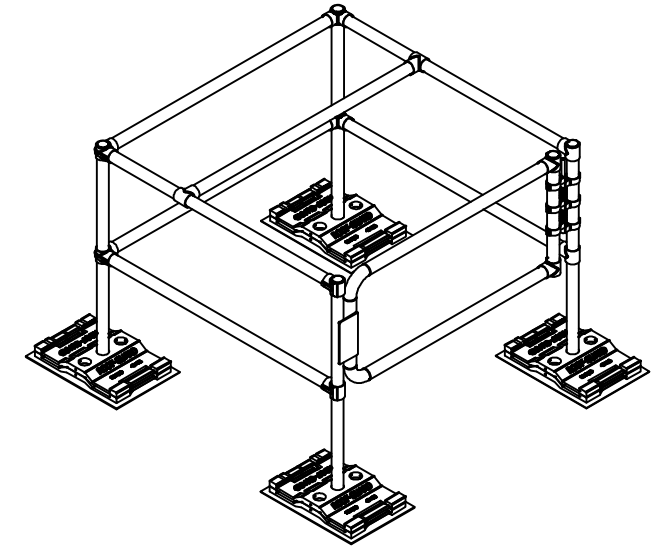


REVISION HISTORY				
REV	ECN	DESCRIPTION	DATE	APPROVED
A		ISSUED FOR FABRICATION		

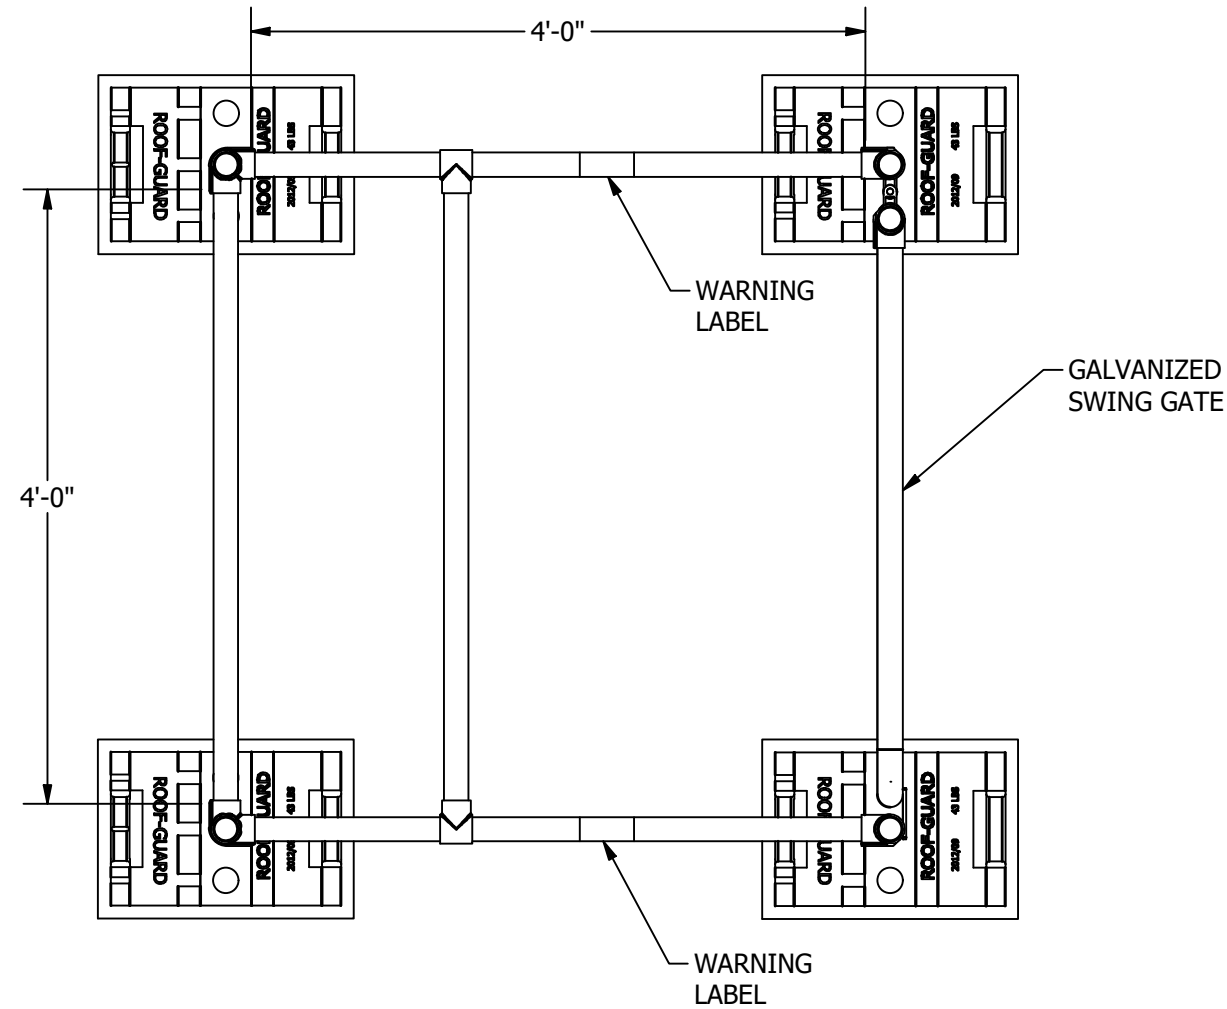

NOTES:

1. INSTALLATION MUST COMPLY WITH ROOF GUARD INSTALLATION MANUAL AS WELL AS BUILDING CODE REQUIREMENTS.
2. GUARDRAIL CONFIGURATION MUST BE AS SHOWN TO COMPLY WITH LOADING REQUIREMENTS OF ONTARIO BUILDING CODE (2006) SECTION 4.1.5.15.1b AND 4.1.5.15.4, AS WELL AS THE NATIONAL BUILDING CODE OF CANADA (2005) SECTION 4.1.5.15.1b AND 4.1.5.15.4.
3. FOR IRREGULAR CONFIGURATIONS NOT MEETING THE SPAN OR TIE-BACK SPACING LISTED ABOVE, PLEASE CONTACT ROOF GUARD FOR A CUSTOM ENGINEERED SOLUTION TO MEET THE REQUIREMENTS.
4. NO MODIFICATIONS SHALL BE MADE TO THE SYSTEM WITHOUT PERMISSION IN WRITING FROM ROOF GUARD AND THE ENGINEER.
5. ALL SET SCREWS TO BE TORQUED TO 13 FT-LBS.
6. ONE SET SCREW PER BASEPLATE, WITH BOTTOM BASE PLATE SET SCREW LINING UP WITH PILOT HOLE IN VERTICAL PIPE.
7. EACH BASEPLATE SITS ON A 1/8" MASTICATED RUBBER PAD TO PROVIDE PROTECTION TO THE ROOFING MEMBRANE.
8. GUARDRAIL TO BE 1.5" SCHEDULE 40 6061-T6 ALUMINUM PIPE.

Designed by: D.K.	<b>ROOFGUARD GUARDRAIL SYSTEM</b>  <a href="http://www.fallsafetysolutions.com">www.fallsafetysolutions.com</a> T. (519) 896-2430/1-800-977-2005 Email: <a href="mailto:info@liftsafe.com">info@liftsafe.com</a> F. (519) 896-2085 <small>THIS DRAWING AND THE INTELLECTUAL INFORMATION ON THIS DRAWING ARE THE PROPERTY OF LIFTSAFE FALL PROTECTION INC. AND MAY NOT BE REPRODUCED OR USED IN ANY MANNER WITHOUT OUR WRITTEN CONSENT</small>					
Drafted by: E.D.						
Checked by:	<b>ALL MEASUREMENTS IN IMPERIAL UNITS - INCH/POUND/DEGREE</b>					
Date:	Description: <b>HatchGuard - 4ft x 4ft</b>					
Origin#	Third Angle Projection	Weight: 349 lbmass	Sheet: 1 of 1	Scale: 1/15	DWG# HG-KIT-08	REV A
General Tolerance ± 1/2"						
Angular ± 1/16						
Fraction ± 0.005						
.xxx ± 0.010						
.xx ± 0.020						
.x ± 0.020						