



SPECIFICATION SHEET

ROOFGUARD X-PRESS GUARDRAIL SYSTEM

DID YOU KNOW...

It is required by law that each employee on a walking /working surface with an unprotected side or edge of 6 feet or more above a lower level must be protected by the use of guardrail, safety net or personal fall arrest systems.

ROOFGUARD X-PRESS


A versatile, economic and modular fall protection system designed to protect employees/contractors performing job functions at the leading edge of a rooftop.

Our system requires no penetration of the roof surface. Our counterweighted system utilizes stackable cast steel base plates to provide enough weight on the "returns" to meet all lateral force loading requirements. Consists of prefabricated, powder coated pipes and galvanized steel base plates.

Easy to use, easy to install, saves lives!


MEETS AND EXCEEDS ALL MAJOR NORTH AMERICAN SAFETY STANDARDS

OHSA	NBC	CSA	CE CERTIFICATION
OBC	OSHA	BS EN	
MOL	ANSI	WORKSAFEB	

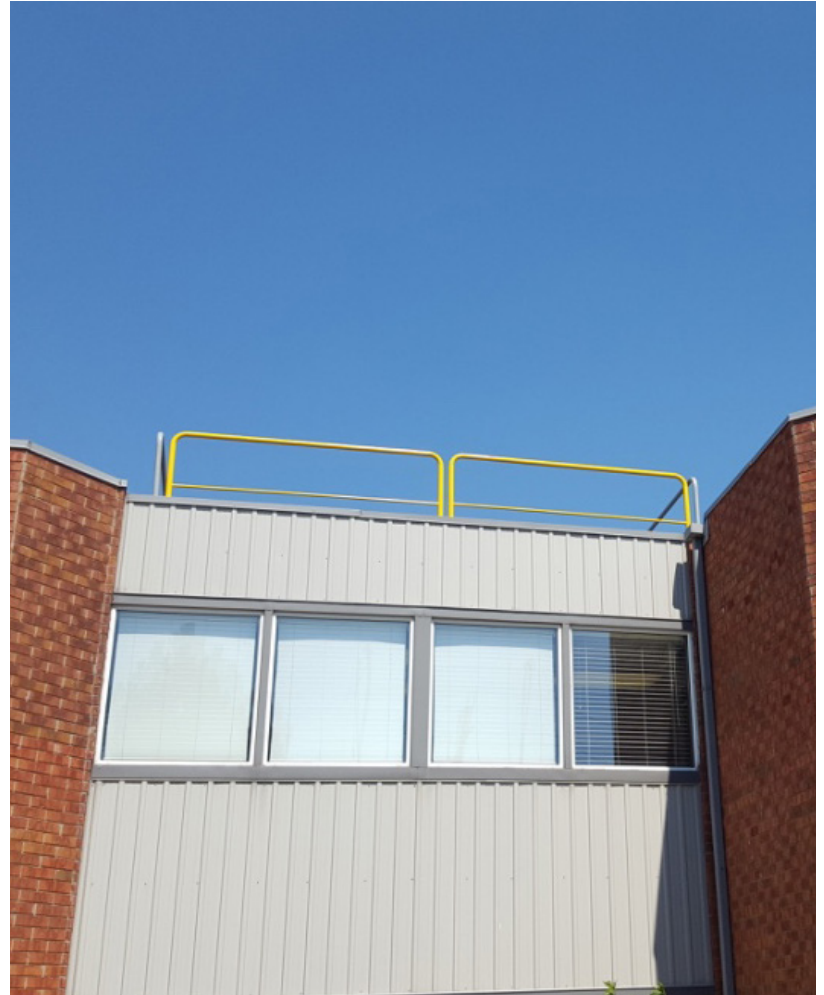

ROOFGUARD ROOF RAILING SYSTEM: INCLUDING POSTS, RAILS, BASES, AND FITTINGS.

Freestanding counterweighted guardrail system with 42 inches minimum height provides a barrier for workers on the roof and must be designed to withstand OBC loading criteria.

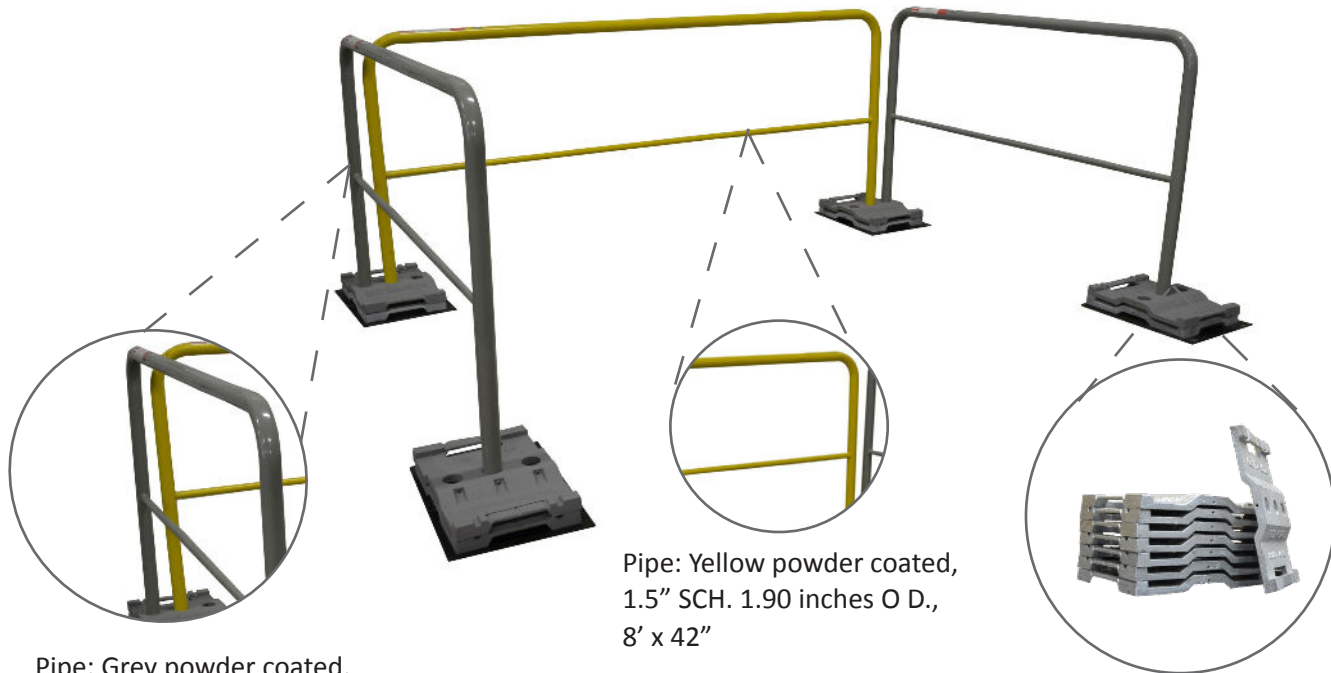

Pipe: Grey powder coated,
1.5" SCH. 1.90 inches O D.,
6' x 42"

Pipe: Yellow powder coated,
1.5" SCH. 1.90 inches O D.,
8' x 42"

Stackable Base Plates: Galvanized cast
steel weights (40 lbs) with three optional
holes for vertical post-placement.
Includes handles to avoid pinch points.
Masticated rubber pad included.



WHY ROOFGUARD?

- Systems are customizable and can be configured to best suit the customer's needs
- User friendly and ergonomic
- Low cost & easy installation

REQUEST A FOLLOW-UP

Email: info@liftsafegroup.com
Call: 1-800-977-2005

Liftsafe Fall Protection, Inc.
A Division of Liftsafe Group of Companies
409 Harmony Rd, Ayr, ON N0B 1E0
P: (519) 896-2430 | TF: (800) 977-2005 | F: (519) 896-2085
E: info@liftsafegroup.com | W: www.liftsafegroup.com

